



QuartzDesk JVM Agent Installation and Upgrade Guide for RedHat JBoss AS 6.1.0 and 7.x Community, 6.x and 7.x EAP

QuartzDesk Version: 3.x

January 21, 2019



Table of Contents

1.	PURPOSE	3
2.	DEFINITIONS	4
3.	REQUIREMENTS.....	5
3.1	SOFTWARE REQUIREMENTS	5
3.1.1	<i>Operating System</i>	<i>5</i>
3.1.2	<i>Java</i>	<i>5</i>
3.1.3	<i>Application Server.....</i>	<i>5</i>
3.1.4	<i>Database</i>	<i>5</i>
3.1.5	<i>Database JDBC Driver.....</i>	<i>6</i>
3.1.6	<i>QuartzDesk JVM Agent Library.....</i>	<i>6</i>
3.1.7	<i>QuartzDesk Public API Library.....</i>	<i>6</i>
3.2	HARDWARE REQUIREMENTS.....	7
4.	INSTALLATION.....	8
4.1	DATABASE.....	8
4.2	JDBC DRIVER	8
4.3	JVM AGENT WORK DIRECTORY	8
4.4	JVM AGENT CONFIGURATION	9
4.5	INSTALL JVM AGENT.....	10
4.5.1	<i>Create JBoss Module</i>	<i>10</i>
4.5.2	<i>Update JBoss Startup Script</i>	<i>11</i>
4.6	INSTALL PUBLIC API LIBRARY	25
4.7	STOP JBOSS AS	26
4.8	START JBOSS AS	26
5.	UPGRADING	27
5.1	STOP JBOSS AS	27
5.2	BACKUP.....	27
5.3	UPGRADE JVM AGENT.....	27
5.4	UPGRADE PUBLIC API LIBRARY	27
5.5	START JBOSS AS	27
6.	QUARTZDESK 2.X TO 3.X MIGRATION NOTES	28
6.1	MINIMUM REQUIRED JAVA VERSION.....	28
6.2	CHANGED NAMES OF CONFIGURATION PROPERTIES	28
6.3	UPGRADE STEPS	28
7.	CLUSTER DEPLOYMENT NOTES.....	29
7.1	SHARED WORK DIRECTORY	29
7.2	LOGGING CONFIGURATION	29
7.2.1	<i>Using Shared Log Files.....</i>	<i>29</i>
7.2.2	<i>Using Separate Log Files.....</i>	<i>30</i>
7.3	INSTALLATION AND UPGRADE ROLL-OUT.....	32

1. Purpose

This document describes the installation and upgrade process for the QuartzDesk JVM Agent 3.x on RedHat JBoss Application Server 6.1.0 and 7.x Community, 6.x and 7.x EAP releases.

QuartzDesk JVM Agent is a Java Virtual Machine (JVM) plugin that must be installed in all JVMs powering applications with embedded Quartz schedulers managed by QuartzDesk. The QuartzDesk JVM Agent enables the following QuartzDesk features:

- Adding and editing of triggers
- Job and trigger execution history
- Execution notification rules
- Job chaining
- Job and trigger health indicators
- Viewing of misfired triggers
- Viewing of planned job execution
- Job and trigger execution statistics

Please note that the installation of the QuartzDesk JVM Agent is required only by the QuartzDesk Standard and Enterprise editions. The QuartzDesk Lite edition does not contain any of the above features and therefore it does not require the installation of the QuartzDesk JVM Agent.



If the QuartzDesk GUI detects the QuartzDesk JVM Agent is not installed / enabled in a remote JVM it connects to, it displays a warning message and the above listed features are disabled in the QuartzDesk GUI.

If you experience any problems installing or upgrading the QuartzDesk JVM Agent, please let us know at support@quartzdesk.com.

2. Definitions

The following table lists all acronyms and shortcuts used throughout this document.

Acronym / Shortcut	Definition
AS	Application Server.
EAR	Enterprise Application Archive. A file with <code>.ear</code> extension.
JAR	Java Application Archive. A file with <code>.jar</code> extension.
JVM	Java Virtual Machine.
JAC	JBoss Administrative Console.
JAS	JBoss Application Server.
WAR	Web Application Archive. A file with <code>.war</code> extension.

The following table lists all locations and properties used throughout this document.

Location / Property	Example	Description
AGENT_WORK_DIR	<code>/var/quartzdesk-agent.work</code>	QuartzDesk JVM Agent work directory.
DB_HOST	<code>localhost</code>	QuartzDesk JVM Agent database server host.
DB_PORT	<code>5432</code>	QuartzDesk JVM Agent database server port.
DB_NAME	<code>quartzdesk_agent</code>	QuartzDesk JVM Agent database name.
DB_SCHEMA	<code>quartzdesk_agent</code>	QuartzDesk JVM Agent database schema.
DB_USER	<code>quartzdesk_agent</code>	QuartzDesk JVM Agent database user.
DB_PASSWORD	<code>quartzdesk_agent</code>	QuartzDesk JVM Agent database user password.
JAS_INSTALL_ROOT	<code>/usr/local/jboss</code>	JBoss Application Server installation directory.
JDBC_DRIVER_JAR_PATH	<code>/var/jdbc/mysql/ mysql-connector-java-5.1.23-bin.jar</code>	File path of the JDBC driver JAR used by the QuartzDesk JVM Agent.

3. Requirements

3.1 Software Requirements

3.1.1 Operating System

Windows XP, Windows Vista, Windows 7, Windows 8, Windows 10.
Linux (any distribution) with kernel 2.6.x and above.
Solaris 11.x and above.

3.1.2 Java

Sun/Oracle Java (JDK) 7, 8, 9, 10.
IBM Java (JDK) 7, 8, 9.
OpenJDK 7, 8, 9, 10.

3.1.3 Application Server

Below-listed RedHat JBoss Application Server Community and EAP releases.



The QuartzDesk JVM Agent is not compatible with JBoss 7.2.0 Community and JBoss 6.1.0 EAP releases. The following table provides a complete compatibility overview for individual JBoss AS Community and EAP releases.

JBoss AS Release	Compatible	Notes
JBoss 6.1.0 Community	Yes	
JBoss 7.1.1 Community	Yes	
JBoss 7.2.0 Community	No	Does not work due to JBoss bug https://issues.jboss.org/browse/WFLY-1432
JBoss 6.1.0 EAP	No	Does not work due to JBoss bug https://issues.jboss.org/browse/WFLY-1432
Note: JBoss 6.1.0 EAP is based on JBoss 7.2.0 Community.		
JBoss 6.2.0 EAP	Yes	
JBoss 6.3.0 EAP	Yes	
JBoss 6.4.0 EAP	Yes	
JBoss 7.0.0 EAP	Yes	
JBoss 7.1.0 EAP	Yes	

3.1.4 Database

Database	Minimum Version
DB2	10.1
H2	1.3.174
Microsoft SQL Server	2008 R2 SP1
MySQL	5.6.4
Oracle	10.2 (10g R2)
PostgreSQL	9.1

3.1.5 Database JDBC Driver

Database	JDBC Driver
DB2	IBM DB2 JDBC 4.0 driver available at http://www-01.ibm.com/support/docview.wss?uid=swg21363866 .
H2	Database engine including the JDBC driver is available at http://www.h2database.com .
Microsoft SQL Server	Microsoft JDBC driver 4.0 for SQL Server available at http://msdn.microsoft.com/en-us/sqlserver/aa937724.aspx . We strongly advise against using the alternative JTDS JDBC driver, because it currently does not support the datetime2 data type. As a result, all datetime values written by the QuartzDesk application would end up rounded up, or down. For datetime data type rounding details, please refer to http://msdn.microsoft.com/en-us/library/ms187819.aspx .
MySQL	Connector/J JDBC driver available at http://dev.mysql.com/downloads/connector/j/ .
Oracle	Oracle JDBC driver available at http://www.oracle.com/technetwork/database/features/jdbc/index-091264.html . For a comprehensive overview of JDBC driver versions vs. supported database versions, please refer to http://www.oracle.com/technetwork/database/enterprise-edition/jdbc-faq-090281.html#01_02 .
PostgreSQL	JDBC4 PostgreSQL driver available at http://jdbc.postgresql.org/ .

3.1.6 QuartzDesk JVM Agent Library

To install the QuartzDesk JVM Agent, you need to obtain the QuartzDesk JVM Agent JAR. The latest version can be downloaded at www.quartzdesk.com (click Downloads → Latest Release → View files → quartzdesk-agent-x.y.z.jar).

3.1.7 QuartzDesk Public API Library

QuartzDesk JVM Agent requires all applications with embedded Quartz schedulers deployed on the given JVM to have the QuartzDesk Public API Library on their classpath. The latest version can be downloaded at www.quartzdesk.com (click Downloads → Latest Release → View files → quartzdesk-api-x.y.z.jar).

The QuartzDesk Public API library is also available in the Maven Central repository – see <http://search.maven.org/#search|ga|1|quartzdesk-api>.

3.2 Hardware Requirements

QuartzDesk JVM Agent runs on any physical or virtualized hardware that supports the above software requirements.



4. Installation

4.1 Database

Create a new database user named `quartzdesk_agent` (`DB_USER`) with an arbitrary password (`DB_PASSWORD`).

Create a new QuartzDesk JVM Agent database named `quartzdesk_agent1` (`DB_NAME`) owned by the `DB_USER`.

If the database supports database schemas, create a new schema named `quartzdesk_agent` (`DB_SCHEMA`). The schema must be owned by the `DB_USER`. Make the created `DB_SCHEMA` the default schema of the `DB_USER` and/or add the schema to the `DB_USER`'s schema search path.

Please contact your DBA, or refer to the database engine documentation for instructions on how to complete the above database-specific tasks.



Please note that you do not have to create any other database objects (tables, keys, indices etc.) in the QuartzDesk JVM Agent database. These objects will be automatically created by the QuartzDesk JVM Agent during its first run.

4.2 JDBC Driver

Download and install the JDBC driver for the created database. For a list of supported JDBC drivers please refer to chapter 3.1.5.

Make sure the JDBC driver JAR files are readable by the user the JAS process is started under.

4.3 JVM Agent Work Directory

Create the QuartzDesk JVM Agent work directory (`AGENT_WORK_DIR`) anywhere on the local file system. The directory must be readable and writeable by the user the JAS process runs under.

Copy your QuartzDesk license key file (`license.key`) to `AGENT_WORK_DIR`.



You can obtain a free 30-day trial license key at www.quartzdesk.com (open the Try / Purchase menu).


Open the QuartzDesk JVM Agent JAR file and copy all files from the `extras/work` directory into `AGENT_WORK_DIR`.



If you cannot open the JAR file directly, rename it to `*.zip` and then open it. Do not forget to rename the file back to `*.jar` once you have extracted the required files.

¹ DB2 restricts the database name length to the maximum of 8 characters. Please adjust the database name accordingly (e.g. `qdagent`).

In the following figure you can see an example of a QuartzDesk JVM Agent work directory correctly set up on a Microsoft Windows machine.

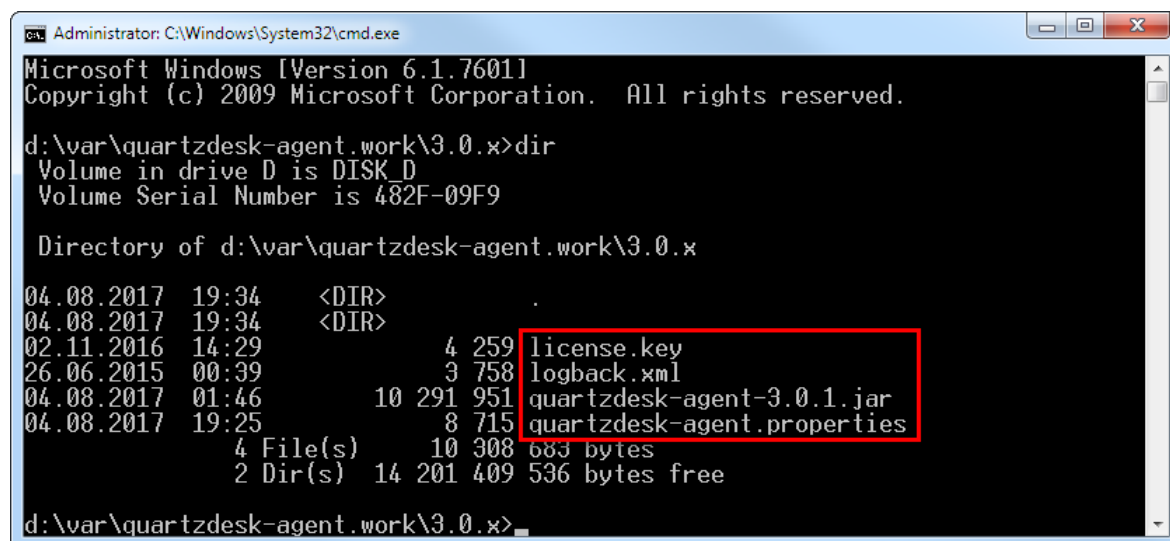

4.4 JVM Agent Configuration

Open the QuartzDesk JVM Agent configuration file `AGENT_WORK_DIR/quartzdesk-agent.properties`.

Based on the type and version of the database created in step 4.1, change the value of the `db.profile` configuration property according to the following table.

Database	Database Version	db.profile Value
DB2	>= 10.0	db2
H2	>= 1.3.170	h2
Microsoft SQL Server	>= 2008	mssql
MySQL	>= 5.6	mysql
MySQL (Inno)	>= 5.6	mysql_inno
Oracle	== 8i	oracle8
Oracle	>= 9i	oracle9
PostgreSQL	== 8.1	postgres81
PostgreSQL	>= 8.2	postgres82

Uncomment the Agent JDBC pool configuration section based on the QuartzDesk JVM Agent database type. Make sure the JDBC pool configuration sections for other database types are commented out (prefixed with '#'). The default sample `quartzdesk-agent.properties` file assumes the use of a PostgreSQL database.

Adjust values of the JDBC pool configuration parameters to match your database configuration. You will typically need to change the default host value (`localhost`) in the `jdbc.url` parameter to point to `DB_HOST`. Please refer to the JDBC driver manual for a description of the JDBC URL format and related details.

Set the value of the `jdbc.pool.maxTotal` JDBC pool configuration parameter to be 10-20% higher than the maximum number of **concurrently executing** Quartz jobs on the JVM the QuartzDesk JVM Agent will be installed on.

To adjust QuartzDesk JVM Agent logging parameters, edit the `AGENT_WORK_DIR/logback.xml` configuration file. The default sample `logback.xml` configuration file creates the QuartzDesk JVM Agent log under the `AGENT_WORK_DIR/logs` directory that is automatically created when the QuartzDesk JVM Agent starts. Please refer to the [Logback Manual](#) for Logback configuration details.

4.5 Install JVM Agent

To manage Quartz schedulers embedded in applications deployed in JAS, you must first enable remote JMX access to JAS. Please refer to the **How to Enable Remote JMX Access to Quartz Schedulers** document available at www.quartzdesk.com/documentation/how-tos. Once the remote JMX access has been enabled, continue with the steps below.

4.5.1 Create JBoss Module

Create a new JBoss module directory according to the following table:

JBoss AS Release	Module Directory
JBoss 6.1.0 Community	<code>JAS_INSTALL_ROOT/modules/com/quartzdesk/agent/main</code> Please note that JBoss 6.1.0 Community does not support the notion of a JBoss module that was introduced in later JBoss releases. Therefore you can safely skip creating the JBoss module. In that case we recommend copying the QuartzDesk JVM Agent JAR to the created <code>AGENT_WORK_DIR</code> .
JBoss 7.1.1 Community	<code>JAS_INSTALL_ROOT/modules/com/quartzdesk/agent/main</code>
JBoss 7.2.0 Community	Not compatible, see 3.1.3.
JBoss 6.1.0 EAP	Not compatible, see 3.1.3.
JBoss 6.2.0 EAP	<code>JAS_INSTALL_ROOT/modules/system/layers/base/com/quartzdesk/agent/main</code>
JBoss 6.3.0 EAP	<code>JAS_INSTALL_ROOT/modules/system/layers/base/com/quartzdesk/agent/main</code>
JBoss 6.4.0 EAP	<code>JAS_INSTALL_ROOT/modules/system/layers/base/com/quartzdesk/agent/main</code>

JBoss 7.0.0 EAP

JAS_INSTALL_ROOT/modules/system/layers/base/com/quartzdesk/agent/main

JBoss 7.1.0 EAP

JAS_INSTALL_ROOT/modules/system/layers/base/com/quartzdesk/agent/main

Copy the QuartzDesk JVM Agent JAR to the created JBoss module directory and rename the file to quartzdesk-agent.jar.

Create a new module.xml file in the created JBoss module directory and paste the following data to it:

```
<?xml version="1.0" encoding="UTF-8"?>

<module xmlns="urn:jboss:module:1.1" name="com.quartzdesk.agent">
  <resources>
    <resource-root path="quartzdesk-agent.jar"/>
  </resources>

  <dependencies>
    <module name="javax.xml.bind.api"/>
  </dependencies>
</module>
```

4.5.2 Update JBoss Startup Script

This chapter describes changes to the JBoss startup script and assumes that JBoss is run in the Standalone mode. If you are running JBoss in the Domain mode, the required changes are similar, but you need to apply them to a different JBoss startup script (e.g. domain.conf.bat / domain.conf etc.).



4.5.2.1 JBoss 6.1.0 Community

Windows

Open the `JAS_INSTALL_ROOT\bin\run.conf.bat` file in a text editor and add the following lines at the beginning of the file:

```
rem QuartzDesk JVM Agent: This prevents the boot.log file from being
created in the "${jboss.boot.server.log.dir}" directory that would be
created during JBoss startup
set "JAVA_OPTS=%JAVA_OPTS% -
Djboss.boot.server.log.dir=%JBOSS_HOME%\server\default\log"

rem QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
set "JAVA_OPTS=%JAVA_OPTS% -javaagent:<AGENT_JAR_PATH>"
set "JAVA_OPTS=%JAVA_OPTS% -Dquartzdesk-
agent.work.dir=<AGENT_WORK_DIR>"
set "JAVA_OPTS=%JAVA_OPTS% -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"

rem QuartzDesk JVM Agent: Instruct JBoss to use the platform MBean
server to register its MBeans with
set "JAVA_OPTS=%JAVA_OPTS% -Djboss.platform.mbeanserver"

rem QuartzDesk JVM Agent: Instruct JVM to use the JBoss MBean server
as the platform MBean server
set "JAVA_OPTS=%JAVA_OPTS% -
Djavax.management.builder.initial=org.jboss.system.server.jmx.MBeanSer
verBuilderImpl"

rem QuartzDesk JVM Agent: Use the JBoss logmanager
set "JAVA_OPTS=%JAVA_OPTS% -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"

rem QuartzDesk JVM Agent: Add JBoss logmanager to the server classpath
set "JBOSS_CLASSPATH=../lib/jboss-logmanager.jar"

rem QuartzDesk JVM Agent: Required if a security manager is installed.
set "JAVA_OPTS=%JAVA_OPTS% -Dsun.util.logging.disableCallerCheck=true"
```

Unix/Linux

Open the `JAS_INSTALL_ROOT/bin/run.conf` file in a text editor and add the following lines at the beginning of the file:

```
# QuartzDesk JVM Agent: This prevents the boot.log file from being
created in the "${jboss.boot.server.log.dir}" directory that would be
created during JBoss startup
JAVA_OPTS="${JAVA_OPTS} -
Djboss.boot.server.log.dir=${JBOSS_HOME}/server/default/log"

# QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
JAVA_OPTS="${JAVA_OPTS} -javaagent:<AGENT_JAR_PATH>"
JAVA_OPTS="${JAVA_OPTS} -Dquartzdesk-agent.work.dir=<AGENT_WORK_DIR>"
JAVA_OPTS="${JAVA_OPTS} -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"

# QuartzDesk JVM Agent: Instruct JBoss to use the platform MBean
server to register its MBeans with
JAVA_OPTS="${JAVA_OPTS} -Djboss.platform.mbeanserver"

# QuartzDesk JVM Agent: Instruct JVM to use the JBoss MBean server as
the platform MBean server
JAVA_OPTS="${JAVA_OPTS} -
Djavax.management.builder.initial=org.jboss.system.server.jmx.MBeanSe
rverBuilderImpl"

# QuartzDesk JVM Agent: Use the JBoss logmanager
JAVA_OPTS="${JAVA_OPTS} -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"

# QuartzDesk JVM Agent: Add JBoss logmanager to the server classpath
JBOSS_CLASSPATH="../lib/jboss-logmanager.jar"

# QuartzDesk JVM Agent: Required if a security manager is installed.
JAVA_OPTS="${JAVA_OPTS} -Dsun.util.logging.disableCallerCheck=true"
```

4.5.2.2 JBoss 7.1.1 Community

Windows

Open the `JAS_INSTALL_ROOT\bin\standalone.conf.bat` file in a text editor and add the following lines at the beginning of the file:

```
rem QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
set "JBOSS_HOME=<JBOSS_INSTALL_ROOT>"

rem QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
set "JAVA_OPTS=%JAVA_OPTS% -
javaagent:%JBOSS_HOME%\modules\com\quartzdesk\agent\main\quartzdesk-
agent.jar"
set "JAVA_OPTS=%JAVA_OPTS% -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
set "JAVA_OPTS=%JAVA_OPTS% -Dquartzdesk-
agent.work.dir=<AGENT_WORK_DIR>"

rem QuartzDesk JVM Agent: Use the JBoss logmanager
set "JAVA_OPTS=%JAVA_OPTS% -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\org\jboss\logmanager\main\jboss-
logmanager-1.2.2.GA.jar"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\org\jboss\logmanager\log4j\main\
jboss-logmanager-log4j-1.0.0.GA.jar"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\org\apache\log4j\main\log4j-
1.2.16.jar"

rem QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent
system packages (com.quartzdesk.agent and ext)
set "JAVA_OPTS=%JAVA_OPTS% -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.
quartzdesk.agent,ext"

rem QuartzDesk JVM Agent: Required if a security manager is installed.
set "JAVA_OPTS=%JAVA_OPTS% -Dsun.util.logging.disableCallerCheck=true"
```

Unix/Linux

Open the `JAS_INSTALL_ROOT/bin/standalone.conf` file in a text editor and add the following lines at the beginning of the file:

```
# QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
JBOSS_HOME="<JBOSS_INSTALL_ROOT>"

# QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
JAVA_OPTS="{JAVA_OPTS} -
javaagent:{JBOSS_HOME}/modules/com/quartzdesk/agent/main/quartzdesk-
agent.jar"
JAVA_OPTS="{JAVA_OPTS} -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
JAVA_OPTS="{JAVA_OPTS} -Dquartzdesk-agent.work.dir=<AGENT_WORK_DIR>"

# QuartzDesk JVM Agent: Use the JBoss logmanager
JAVA_OPTS="{JAVA_OPTS} -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/org/jboss/logmanager/main/jbos-
s-logmanager-1.2.2.GA.jar"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/org/jboss/logmanager/log4j/mai-
n/jboss-logmanager-log4j-1.0.0.GA.jar"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/org/apache/log4j/main/log4j-
1.2.16.jar"

# QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent
system packages (com.quartzdesk.agent and ext)
JAVA_OPTS="{JAVA_OPTS} -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com
.quartzdesk.agent,ext"

# QuartzDesk JVM Agent: Required if a security manager is installed.
JAVA_OPTS="{JAVA_OPTS} -Dsun.util.logging.disableCallerCheck=true"
```

4.5.2.3 JBoss 6.2.0 EAP

Windows

Open the `JAS_INSTALL_ROOT\bin\standalone.conf.bat` file in a text editor and add the following lines at the beginning of the file:

```
rem QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
set "JBOSS_HOME=<JBOSS_INSTALL_ROOT>"

rem QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
set "JAVA_OPTS=%JAVA_OPTS% -
javaagent:%JBOSS_HOME%\modules\system\layers\base\com\quartzdesk\agent
\main\quartzdesk-agent.jar"
set "JAVA_OPTS=%JAVA_OPTS% -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
set "JAVA_OPTS=%JAVA_OPTS% -Dquartzdesk-
agent.work.dir=<AGENT_WORK_DIR>"

rem QuartzDesk JVM Agent: Use the JBoss logmanager
set "JAVA_OPTS=%JAVA_OPTS% -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
manager\main\jboss-logmanager-1.5.1.Final-redhat-1.jar"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
4j\logmanager\main\log4j-jboss-logmanager-1.0.2.Final-redhat-1.jar"

rem QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent
system packages (com.quartzdesk.agent and ext)
set "JAVA_OPTS=%JAVA_OPTS% -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.
quartzdesk.agent,ext"

rem QuartzDesk JVM Agent: Required if a security manager is installed.
set "JAVA_OPTS=%JAVA_OPTS% -Dsun.util.logging.disableCallerCheck=true"
```


Unix/Linux

Open the `JAS_INSTALL_ROOT/bin/standalone.conf` file in a text editor and add the following lines at the beginning of the file:

```
# QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
JBOSS_HOME="<JBOSS_INSTALL_ROOT>"

# QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
JAVA_OPTS="{JAVA_OPTS} -
javaagent:{JBOSS_HOME}/modules/system/layers/base/com/quartzdesk/agent/main/quartzdesk-agent.jar"
JAVA_OPTS="{JAVA_OPTS} -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
JAVA_OPTS="{JAVA_OPTS} -Dquartzdesk-agent.work.dir=<AGENT_WORK_DIR>"

# QuartzDesk JVM Agent: Use the JBoss logmanager
JAVA_OPTS="{JAVA_OPTS} -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/logmanager/main/jboss-logmanager-1.5.1.Final-redhat-1.jar"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/log4j/logmanager/main/log4j-jboss-logmanager-1.0.2.Final-redhat-1.jar"

# QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent system packages (com.quartzdesk.agent and ext)
JAVA_OPTS="{JAVA_OPTS} -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.quartzdesk.agent,ext"

# QuartzDesk JVM Agent: Required if a security manager is installed.
JAVA_OPTS="{JAVA_OPTS} -Dsun.util.logging.disableCallerCheck=true"
```

4.5.2.4 JBoss 6.3.0 EAP

Windows

Open the `JAS_INSTALL_ROOT\bin\standalone.conf.bat` file in a text editor and add the following lines at the beginning of the file:

```
rem QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
set "JBOSS_HOME=<JBOSS_INSTALL_ROOT>"

rem QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
set "JAVA_OPTS=%JAVA_OPTS% -
javaagent:%JBOSS_HOME%\modules\system\layers\base\com\quartzdesk\agent
\main\quartzdesk-agent.jar"
set "JAVA_OPTS=%JAVA_OPTS% -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
set "JAVA_OPTS=%JAVA_OPTS% -Dquartzdesk-
agent.work.dir=<AGENT_WORK_DIR>"

rem QuartzDesk JVM Agent: Use the JBoss logmanager
set "JAVA_OPTS=%JAVA_OPTS% -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
manager\main\jboss-logmanager-1.5.2.Final-redhat-1.jar"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
4j\logmanager\main\log4j-jboss-logmanager-1.1.0.Final-redhat-2.jar"

rem QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent
system packages (com.quartzdesk.agent and ext)
set "JAVA_OPTS=%JAVA_OPTS% -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.
quartzdesk.agent,ext"

rem QuartzDesk JVM Agent: Required if a security manager is installed.
set "JAVA_OPTS=%JAVA_OPTS% -Dsun.util.logging.disableCallerCheck=true"
```

Unix/Linux

Open the `JAS_INSTALL_ROOT/bin/standalone.conf` file in a text editor and add the following lines at the beginning of the file:

```
# QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
JBOSS_HOME="<JBOSS_INSTALL_ROOT>"

# QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
JAVA_OPTS="{JAVA_OPTS} -
javaagent:{JBOSS_HOME}/modules/system/layers/base/com/quartzdesk/agent/main/quartzdesk-agent.jar"
JAVA_OPTS="{JAVA_OPTS} -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
JAVA_OPTS="{JAVA_OPTS} -Dquartzdesk-agent.work.dir=<AGENT_WORK_DIR>"

# QuartzDesk JVM Agent: Use the JBoss logmanager
JAVA_OPTS="{JAVA_OPTS} -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/logmanager/main/jboss-logmanager-1.5.2.Final-redhat-1.jar"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/log4j/logmanager/main/log4j-jboss-logmanager-1.1.0.Final-redhat-2.jar"

# QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent system packages (com.quartzdesk.agent and ext)
JAVA_OPTS="{JAVA_OPTS} -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.quartzdesk.agent,ext"

# QuartzDesk JVM Agent: Required if a security manager is installed.
JAVA_OPTS="{JAVA_OPTS} -Dsun.util.logging.disableCallerCheck=true"
```

4.5.2.5 JBoss 6.4.0 EAP

Windows

Open the `JAS_INSTALL_ROOT\bin\standalone.conf.bat` file in a text editor and add the following lines at the beginning of the file:

```
rem QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
set "JBOSS_HOME=<JBOSS_INSTALL_ROOT>"

rem QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
set "JAVA_OPTS=%JAVA_OPTS% -
javaagent:%JBOSS_HOME%\modules\system\layers\base\com\quartzdesk\agent
\main\quartzdesk-agent.jar"
set "JAVA_OPTS=%JAVA_OPTS% -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
set "JAVA_OPTS=%JAVA_OPTS% -Dquartzdesk-
agent.work.dir=<AGENT_WORK_DIR>"

rem QuartzDesk JVM Agent: Use the JBoss logmanager
set "JAVA_OPTS=%JAVA_OPTS% -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
manager\main\jboss-logmanager-1.5.4.Final-redhat-1.jar"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
4j\logmanager\main\log4j-jboss-logmanager-1.1.1.Final-redhat-1.jar"

rem QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent
system packages (com.quartzdesk.agent and ext)
set "JAVA_OPTS=%JAVA_OPTS% -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.
quartzdesk.agent,ext"

rem QuartzDesk JVM Agent: Required if a security manager is installed.
set "JAVA_OPTS=%JAVA_OPTS% -Dsun.util.logging.disableCallerCheck=true"
```

Unix/Linux

Open the `JAS_INSTALL_ROOT/bin/standalone.conf` file in a text editor and add the following lines at the beginning of the file:

```
# QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
JBOSS_HOME="<JBOSS_INSTALL_ROOT>"

# QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
JAVA_OPTS="{JAVA_OPTS} -
javaagent:{JBOSS_HOME}/modules/system/layers/base/com/quartzdesk/agent/main/quartzdesk-agent.jar"
JAVA_OPTS="{JAVA_OPTS} -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
JAVA_OPTS="{JAVA_OPTS} -Dquartzdesk-agent.work.dir=<AGENT_WORK_DIR>"

# QuartzDesk JVM Agent: Use the JBoss logmanager
JAVA_OPTS="{JAVA_OPTS} -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/logmanager/main/jboss-logmanager-1.5.4.Final-redhat-1.jar"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/log4j/logmanager/main/log4j-jboss-logmanager-1.1.1.Final-redhat-1.jar"

# QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent system packages (com.quartzdesk.agent and ext)
JAVA_OPTS="{JAVA_OPTS} -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.quartzdesk.agent,ext"

# QuartzDesk JVM Agent: Required if a security manager is installed.
JAVA_OPTS="{JAVA_OPTS} -Dsun.util.logging.disableCallerCheck=true"
```

4.5.2.6 JBoss 7.0.0 EAP

Windows

Open the `JAS_INSTALL_ROOT\bin\standalone.conf.bat` file in a text editor and add the following lines at the beginning of the file:

```
rem QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
set "JBOSS_HOME=<JBOSS_INSTALL_ROOT>"

rem QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
set "JAVA_OPTS=%JAVA_OPTS% -
javaagent:%JBOSS_HOME%\modules\system\layers\base\com\quartzdesk\agent
\main\quartzdesk-agent.jar"
set "JAVA_OPTS=%JAVA_OPTS% -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
set "JAVA_OPTS=%JAVA_OPTS% -Dquartzdesk-
agent.work.dir=<AGENT_WORK_DIR>"

rem QuartzDesk JVM Agent: Use the JBoss logmanager
set "JAVA_OPTS=%JAVA_OPTS% -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
manager\main\jboss-logmanager-2.0.3.Final-redhat-1.jar"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
4j\logmanager\main\log4j-jboss-logmanager-1.1.2.Final-redhat-2.jar"

rem QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent
system packages (com.quartzdesk.agent and ext)
set "JAVA_OPTS=%JAVA_OPTS% -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.
quartzdesk.agent,ext"

rem QuartzDesk JVM Agent: Required if a security manager is installed.
set "JAVA_OPTS=%JAVA_OPTS% -Dsun.util.logging.disableCallerCheck=true"
```

Unix/Linux

Open the `JAS_INSTALL_ROOT/bin/standalone.conf` file in a text editor and add the following lines at the beginning of the file:

```
# QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
JBOSS_HOME="<JBOSS_INSTALL_ROOT>"

# QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
JAVA_OPTS="{JAVA_OPTS} -
javaagent:{JBOSS_HOME}/modules/system/layers/base/com/quartzdesk/agent/main/quartzdesk-agent.jar"
JAVA_OPTS="{JAVA_OPTS} -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
JAVA_OPTS="{JAVA_OPTS} -Dquartzdesk-agent.work.dir=<AGENT_WORK_DIR>"

# QuartzDesk JVM Agent: Use the JBoss logmanager
JAVA_OPTS="{JAVA_OPTS} -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/logmanager/main/jboss-logmanager-2.0.3.Final-redhat-1.jar"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/log4j/logmanager/main/log4j-jboss-logmanager-1.1.2.Final-redhat-2.jar"

# QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent system packages (com.quartzdesk.agent and ext)
JAVA_OPTS="{JAVA_OPTS} -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.quartzdesk.agent,ext"

# QuartzDesk JVM Agent: Required if a security manager is installed.
JAVA_OPTS="{JAVA_OPTS} -Dsun.util.logging.disableCallerCheck=true"
```

4.5.2.7 JBoss 7.1.0 EAP

Windows

Open the `JAS_INSTALL_ROOT\bin\standalone.conf.bat` file in a text editor and add the following lines at the beginning of the file:

```
rem QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
set "JBOSS_HOME=<JBOSS_INSTALL_ROOT>"

rem QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
set "JAVA_OPTS=%JAVA_OPTS% -
javaagent:%JBOSS_HOME%\modules\system\layers\base\com\quartzdesk\agent
\main\quartzdesk-agent.jar"
set "JAVA_OPTS=%JAVA_OPTS% -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
set "JAVA_OPTS=%JAVA_OPTS% -Dquartzdesk-
agent.work.dir=<AGENT_WORK_DIR>"

rem QuartzDesk JVM Agent: Use the JBoss logmanager
set "JAVA_OPTS=%JAVA_OPTS% -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
manager\main\jboss-logmanager-2.0.7.Final-redhat-1.jar"
set "JAVA_OPTS=%JAVA_OPTS% -
Xbootclasspath/p:%JBOSS_HOME%\modules\system\layers\base\org\jboss\log
4j\logmanager\main\log4j-jboss-logmanager-1.1.4.Final-redhat-1.jar"

rem QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent
system packages (com.quartzdesk.agent and ext)
set "JAVA_OPTS=%JAVA_OPTS% -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.
quartzdesk.agent,ext"

rem QuartzDesk JVM Agent: Required if a security manager is installed.
set "JAVA_OPTS=%JAVA_OPTS% -Dsun.util.logging.disableCallerCheck=true"
```


Unix/Linux

Open the `JAS_INSTALL_ROOT/bin/standalone.conf` file in a text editor and add the following lines at the beginning of the file:

```
# QuartzDesk JVM Agent: Set JBOSS_HOME used in paths below
JBOSS_HOME="<<JBOSS_INSTALL_ROOT>"

# QuartzDesk JVM Agent: Agent JAR and JDBC driver JAR(s)
JAVA_OPTS="{JAVA_OPTS} -
javaagent:{JBOSS_HOME}/modules/system/layers/base/com/quartzdesk/agent/main/quartzdesk-agent.jar"
JAVA_OPTS="{JAVA_OPTS} -Xbootclasspath/p:<JDBC_DRIVER_JAR_PATH>"
JAVA_OPTS="{JAVA_OPTS} -Dquartzdesk-agent.work.dir=<AGENT_WORK_DIR>"

# QuartzDesk JVM Agent: Use the JBoss logmanager
JAVA_OPTS="{JAVA_OPTS} -
Djava.util.logging.manager=org.jboss.logmanager.LogManager"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/logmanager/main/jboss-logmanager-2.0.7.Final-redhat-1.jar"
JAVA_OPTS="{JAVA_OPTS} -
Xbootclasspath/p:{JBOSS_HOME}/modules/system/layers/base/org/jboss/log4j/logmanager/main/log4j-jboss-logmanager-1.1.4.Final-redhat-1.jar"

# QuartzDesk JVM Agent: Added JBoss logmanager and QuartzDesk agent system packages (com.quartzdesk.agent and ext)
JAVA_OPTS="{JAVA_OPTS} -
Djboss.modules.system.pkgs=org.jboss.byteman,org.jboss.logmanager,com.quartzdesk.agent,ext"

# QuartzDesk JVM Agent: Required if a security manager is installed.
JAVA_OPTS="{JAVA_OPTS} -Dsun.util.logging.disableCallerCheck=true"
```

4.6 Install Public API Library

The QuartzDesk Public API Library (`quartzdesk-api-<version>.jar`) works as an interface between the Quartz library (typically distributed as `quartz-<version>.jar` or `quartz-all-<version>.jar`) used by an application and the QuartzDesk JVM Agent. **The QuartzDesk Public API Library must be loaded by the same Java classloader that loads the Quartz library.**

In JAS, there are two typical cases how the Quartz library is deployed.

- (1) Quartz library is embedded in the application, typically in its `WEB-INF/lib` folder. In this case, the QuartzDesk Public API Library must be copied to this folder.

Please note that the QuartzDesk Public API Library is available in the [Maven Central](#) repository and if you add it as a runtime dependency to the application's POM, it can be automatically copied to the application's `WEB-INF/lib` folder by Maven.

- (2) Quartz library is deployed as a JBoss module and this module is then used by the application. In this case, the QuartzDesk Public API Library must be copied to the Quartz module directory and added to the list of resources in the module's deployment descriptor file (`module.xml`).

No application code changes are required to install the QuartzDesk Public API Library.

4.7 Stop JBoss AS

Stop JAS. Please refer to the JBoss AS administration documentation for details on how to stop JAS.

Wait for the action to complete.


4.8 Start JBoss AS

Start JAS. Please refer to the JBoss AS administration documentation for details on how to start JAS.

Wait for the action to complete.

Check the JAS logs for errors.

Check the QuartzDesk JVM Agent logs (in AGENT_WORK_DIR/logs directory) for errors and verify the version number of the installed QuartzDesk JVM Agent.

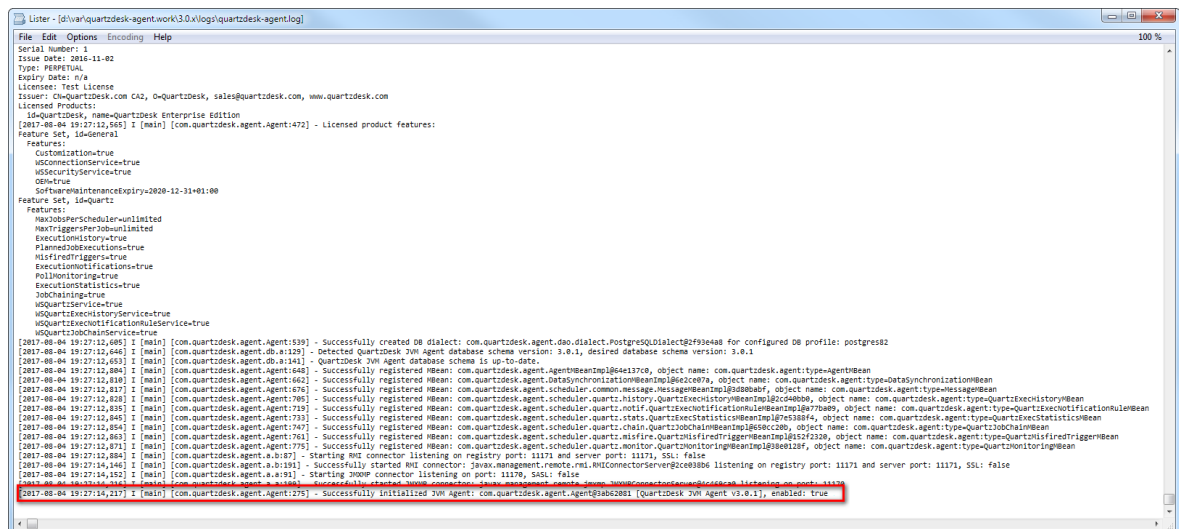

Verify that all applications deployed on JAS work as expected.

5. Upgrading

5.1 Stop JBoss AS

Stop JAS by following the steps outlined in 4.7.

5.2 Backup

Backup your QuartzDesk JVM Agent database. We recommend performing a **full database backup**.

Backup the contents of the QuartzDesk JVM Agent work directory.

Store the backups in a safe place so that you can restore the original QuartzDesk JVM Agent version if the need arises.

5.3 Upgrade JVM Agent

Replace the old QuartzDesk JVM Agent JAR file in the JBoss module (refer to chapter 4.5.1 for details) with the new QuartzDesk JVM Agent JAR file.

Rename the `AGENT_WORK_DIR/quartzdesk-agent.properties` configuration file to `quartzdesk-agent.properties.old`.

Open the QuartzDesk JVM Agent archive (`quartzdesk-agent-x.y.z.jar`) and copy the `extras/work/quartzdesk-agent.properties` configuration file to `AGENT_WORK_DIR`.



If you cannot open the JAR file directly, rename it to `*.zip` and then open it. Do not forget to rename the file back to `*.jar` once you have extracted the required files.

Adjust the values of the configuration properties in the new configuration file `AGENT_WORK_DIR/quartzdesk-agent.properties` to match your system setup. You can use the old configuration file as a reference.

Please refer to 4.4 for a description of the configuration parameters that you need to adjust.

5.4 Upgrade Public API Library

The steps necessary to upgrade this library depend on the way it has been deployed. Please refer to 4.6 for details.

5.5 Start JBoss AS

Start JAS by following the steps outlined in 4.8.

6. QuartzDesk 2.x to 3.x Migration Notes

6.1 Minimum Required Java Version

QuartzDesk JVM Agent v3.x requires Java 7 or higher. Java 6 is no longer supported.

6.2 Changed Names of Configuration Properties

The following two `quartzdesk-agent.properties` configuration properties have been renamed in QuartzDesk JVM Agent 3.x. Make sure your `quartzdesk-agent.properties` file uses the new property names.

Original Configuration Property Name (2.x)	New Configuration Property Name (3.x)
<code>jdbc.pool.maxActive</code>	<code>jdbc.pool.maxTotal</code>
<code>jdbc.pool.maxWait</code>	<code>jdbc.pool.maxWaitMillis</code>

6.3 Upgrade Steps

To upgrade QuartzDesk JVM Agent 2.x to 3.x, apply upgrade steps outlined in 5. When completing steps outlined in 5.3, make sure to use the new configuration property names.



7. Cluster Deployment Notes

When configuring the QuartzDesk JVM Agent in a JBoss cluster you need to follow the configuration steps described in preceding chapters. In addition to these, there are several extra configuration steps that must be performed in cluster deployments.

7.1 Shared Work Directory

We recommend that you put the QuartzDesk JVM Agent work directory, described in chapter 4.3, on a shared drive and make this work directory available to all JBoss cluster members.

7.2 Logging Configuration

If you set up your cluster to use a shared QuartzDesk JVM Agent work directory, as described in the previous chapter, you will need to edit the QuartzDesk JVM Agent logging configuration file `AGENT_WORK_DIR/logback.xml` and decide where QuartzDesk JVM Agent instances running on individual cluster members should log. There are two options:

- 1) Logging into the same (shared) log files.
- 2) Logging into separate log files.

QuartzDesk JVM Agent uses two log files – `quartzdesk.log` and `quartzdesk-trace.log` that are stored in `AGENT_WORK_DIR/logs` directory. The following chapters discuss these two options.

7.2.1 Using Shared Log Files

In order to make individual QuartzDesk JVM Agent instances log into the same log files, you must enable the prudent mode on both file appenders used in the `AGENT_WORK_DIR/logback.xml` configuration file:

```
...
<appender name="FILE"
class="ext.ch.qos.logback.core.rolling.RollingFileAppender">
  <file>${logs.dir}/quartzdesk-agent.log</file>
  <append>true</append>
  <prudent>true</prudent>
  ...
</appender>

<appender name="TRACE_FILE"
class="ext.ch.qos.logback.core.rolling.RollingFileAppender">
  <file>${logs.dir}/quartzdesk-agent-trace.log</file>
  <append>true</append>
  <prudent>true</prudent>
  ...

  <!--
    We must use the TimeBasedRollingPolicy because the
    FixedWindowRollingPolicy is not supported in prudent mode!
  -->
  <rollingPolicy
class="ext.ch.qos.logback.core.rolling.TimeBasedRollingPolicy">
    <!-- daily rollover -->
    <fileNamePattern>${logs.dir}/quartzdesk-agent-trace.log.%d{yyyy-MM-
dd}</fileNamePattern>
    <!-- keep 10 days' worth of history -->
    <maxHistory>10</maxHistory>
  </rollingPolicy>

  <!--
    The SizeBasedTriggeringPolicy removed because it is used only in
    conjunction with the FixedWindowRollingPolicy.
  -->

  <encoder>
    <charset>UTF-8</charset>
    <pattern>[%date] %.-1level [%thread] [%mdc] [%logger:%line] -
%msg%n</pattern>
  </encoder>
</appender>

...
```

For details on the Logback prudent mode, please refer to <http://logback.qos.ch/manual/appenders.html#FileAppender>.



Because prudent mode relies on exclusive file locks to manage concurrent access to the log files and these locks can have negative impact on the QuartzDesk JVM Agent's performance, we generally discourage using the prudent mode and shared log files.

7.2.2 Using Separate Log Files

In order to make individual QuartzDesk JVM Agent instances log into separate log files, you can use a JVM system property set on all cluster member JVMs. The value of this property must be unique for all cluster members. The property can then be referred to from the `AGENT_WORK_DIR/logback.xml` logging configuration file.

The following examples assume the use of the `cluster.member.instanceId` JVM system property, but any JVM system property name can be used.

There are two common approaches as to where the separate log files produced by individual QuartzDesk JVM Agent instances are stored:

1) Log files created under a common log root directory.

```
...

<appender name="FILE"
class="ext.ch.qos.logback.core.rolling.RollingFileAppender">
  <file>${logs.dir}/quartzdesk-agent-${cluster.member.instanceId}.log</file>
  <append>true</append>

  ...

  <rollingPolicy
class="ext.ch.qos.logback.core.rolling.TimeBasedRollingPolicy">
  <!-- daily rollover -->
  <fileNamePattern>${logs.dir}/quartzdesk-agent-
${cluster.member.instanceId}.log.%d{yyyy-MM-dd}</fileNamePattern>
  <!-- keep 10 days' worth of history -->
  <maxHistory>10</maxHistory>
  </rollingPolicy>

  ...

</appender>

<appender name="TRACE_FILE"
class="ext.ch.qos.logback.core.rolling.RollingFileAppender">
  <file>${logs.dir}/quartzdesk-agent-${cluster.member.instanceId}-
trace.log</file>
  <append>true</append>

  ...

  <rollingPolicy
class="ext.ch.qos.logback.core.rolling.FixedWindowRollingPolicy">
  <fileNamePattern>${logs.dir}/quartzdesk-agent-
${cluster.member.instanceId}-trace.log.%i</fileNamePattern>
  <minIndex>1</minIndex>
  <maxIndex>5</maxIndex>
  </rollingPolicy>

  ...

</appender>

...
```

2) Log files created in separate (cluster member specific) log root directories.

```
...
<!--
  Logback context property logback.config.dir is set by the
  LogbackInitContextListener to point to the parent directory of the Logback
  configuration file (logback.xml).
-->
<property name="logs.dir" value="${logback.config.dir:-
.}/${cluster.member.instanceId}/logs"/>
...

```

7.3 Installation and Upgrade Roll-Out

As described in chapter 4.1, the QuartzDesk JVM Agent automatically creates all required database objects in the configured database upon its first start. Similarly, upon every QuartzDesk JVM Agent upgrade the agent automatically applies required changes to the configured database.

If you have configured multiple QuartzDesk JVM Agents to use the same database, collisions are likely to occur if multiple agents are started concurrently and all attempt to realize the database initialization/upgrade procedure described above. To avoid these collisions, please start a single JVM with the configured QuartzDesk JVM Agent and let the agent apply the database changes. Once the database changes have been successfully applied, it is possible to start the other agents (JVMs).

You can check for the following line in the QuartzDesk JVM Agent log to see if the database has been successfully initialized/updated. This log line indicates that the agent has been successfully started at which point all database schema changes have been applied.

```
...
[2017-08-04 13:34:56,215] I [main] [com.quartzdesk.agent.Agent:275] -
Successfully initialized QuartzDesk JVM Agent:
com.quartzdesk.agent.Agent@97e1896 [QuartzDesk JVM Agent v3.0.1], enabled:
true
...

```

